

**AVCS GYRO**  
**GY60 I**  
**INSTRUCTION MANUAL**

**YAW-AXIS STABILIZER FOR MODEL HELICOPTER  
(RATE GYRO)**

Thank you for buying a GY601 AVCS gyro.

Before using your new gyro, please read this manual thoroughly and use the gyro properly and safely. After reading this manual, store it in a safe place.

## FOREWORD

The GY601 gyro is an AVCS (Angular Vector Control System) rate gyro developed for model helicopter competition.

[GY601 Features]

- Super narrow pulse (760 $\mu$ s) drive system substantially improves servo reresponse. An S9251 digital servo is used.
- Microcomputer high-speed arithmetic processing substantially improves gyro response.
- High resolution 12-bit A/D accurately converts the sensor output to a digital signal.
- Newest SMM (Silicon Micro Machine) and low-back aeroform case improve vibration resistance and neutral characteristic.
- Amp mounts an LCD that allows accurate data setting.

[S9251]

- Special servo for the GY601. Compatible with super narrow pulse (760 $\mu$ s) drive.
- Operation speed 0.07sec/60°. High response realized.
- Alumite case w/heat sink effectively cools the motor heat.

## Caution

 **Always use the special S9251 servo with the GY601.**

The GY601 cannot operate with servos other than the S9251.  
The servo may be destroyed.

Warning: This product contains a chemical known to cause cancer and birth defects (or other reproductive harm).

- No part of this manual may be reproduced in any form without prior permission.
- The contents of this manual are subject to change without prior notice.
- This manual has been carefully written. Please write to Futaba if you feel that any corrections or clarifications should be made.

---

# TABLE OF CONTENTS

---

## FOR SAFETY

•Meaning of Special Markings -----	4
•Mounting/Operating Precautions -----	4
•Fuselage Maintenance Precautions -----	6
•S9251 Usage Precautions -----	7

---

## BEFORE USE

•Set Contents -----	8
•AVCS Gyro -----	9

---

## DATA SETTING

•Name and Function of Each Part -----	12
•LCD Display and Edit Keys -----	13
•Function Map -----	14
•GY601 Functions Setting -----	15
•Remote Gain Function -----	21
•Initialization -----	30

---

## INSTALLATION AND ADJUSTMENT

•Installing to Fuselage -----	32
•Flight Adjustments -----	37

---

## REFERENCE






•Specifications -----	40
•Definition of Abbreviations -----	41
•GY601 Parameters Sheet -----	42

# FOR SAFETY

To ensure safe use, observe the following precautions.



## Meaning of Special Markings

Pay special attention to the safety at the parts of this manual that are indicated by the following marks.







Mark	Meaning
 <b>Danger</b>	Procedures which may lead to a dangerous condition and cause death or serious injury to the user if not carried out properly.
 <b>Warning</b>	Procedures which may lead to a dangerous condition or cause death or serious injury to the user if not carried out properly, or procedures where the probability of superficial injury or physical damage is high.
 <b>Caution</b>	Procedures where the possibility of serious injury to the user is small, but there is a danger of injury, or physical damage, if not carried out properly.
Symbol:  ; Prohibited  ; Mandatory	

## Mounting/Operating Precautions




### Warning

-  **Insert the connectors fully and firmly.**  
If a connector works loose due to vibration during flight, control may be lost and result in a dangerous situation.
-  **Always use the GY601 with a PCM proportional system.**  
Using the GY601 with an FM proportional system, when noise enters, the wrong neutral position may be memorized.

## Caution

-  **Always use the accessory sensor tape to install the sensor to the fuselage.** This is necessary to securely fasten the sensor to the fuselage so that operation of the gyro does not transmit unwanted fuselage vibrations directly to the sensor.
-  **When mounting the sensor, provide a little surplus so that the sensor connection cables are not too taut.** If the sensor cables are too taut, the gyro will not display its full performance. If the sensor peels, control will be lost and result in a dangerous situation.
-  **Mount the sensor and control amp so that metals or other conductive objects do not touch these cases.** The GY601 uses a conductive resin case to reduce electromagnetic interference. Because the surface of the case is conductive, metal objects may cause a short circuit.
-  **Mount the sensor and servo at least 2cm apart.**
-  **When using a GV-1 governor, mount the sensor and GV-1 amp at least 5cm apart.**
-  **When using the GY601 with a motor-driven helicopter, mount the sensor and drive motor at least 10cm apart.** Noise from the servo motor, GV-1 amp and drive motor may cause the performance of an erroneously operated gyro to drop.

### **Precautions When Turning on the Power Switch**

- During initialization, the message “-Hello-” appears on the GY601 LCD screen.
-  **Do not move the helicopter until this message disappears (in about 3 seconds).**
  -  **Also, do not move the transmitter rudder stick from the neutral position during this period.**
  -  **Always check the direction of operation of the servos.** If you attempt to fly the model when a servo operates in the wrong direction, the fuselage will spin in a fixed direction and enter an extremely dangerous state.

- ❗ **When the rudder neutral position was changed by the linkage, the rudder neutral position in the AVCS mode must always be re-read before use.**

**Re-reading method:**

Turn on the transmitter in the AVCS mode, then turn on the gyro . Or quickly switch (interval of within 1 second) the remote gain channel switch between the AVCS mode and Normal mode at least three times and switch the AVCS side with the transmitter in the ON state. This memorizes the new rudder position inside the GY601.

- ❗ **Avoid sudden temperature changes.**  
Sudden temperature changes will cause the neutral position to change. For example, in the winter, do not fly immediately after removing the model from inside a heated car and in the summer, do not fly immediately after removing the model from inside an air conditioned car. Allow the model to stand for about 10 minutes and turn on the power after the temperature inside the gyro has stabilized. Also, if the gyro is exposed to direct sunlight or is mounted near the engine, the temperature may change suddenly. Take suitable measures so that the gyro is not exposed to direct sunlight, etc.
- ❗ **Check the remaining receiver/gyro/servo nicd battery operating time during the adjustment stage and decide how many flights are remaining.**
- ⊘ **Never use the transmitter rudder trim in the AVCS mode.**  
When the rudder is trimmed during flight, the neutral position will change.
- ❗ **When using the GY601 in the AVCS mode, set revolution mixing to OFF.**

## Fuselage Maintenance Precautions

---

### ⚠ Caution

- ❗ **Use a tale rotor drive tube or other part with a high torsion performance for the tail drive.**
- ❗ **Take the strength of the tail into account during inspection and adjustment.**

The amount of improvement of gyro performance has a considerable effect on the fuselage vibration level or the size, type, linkage method, looseness, etc. of the tail rotor.

Since a higher gain than usual can be used then the tail rotor is more effective, the load on the tail is also greater.

- ❗ **Always perform proper maintenance for ultimate performance.**  
The rigidity of the fuselage tail has a large effect on gyro performance.
- ❗ **Make the fuselage vibration as small as possible.**  
Fuselage vibration has an adverse affect on gyro operation.

## S925 I Usage Precautions

---

### ⚠ Caution

- ⊘ **Do not use the S9251 with applications other than the GY601 gyro.**  
The S9251 is designed to be used with the GY601 only, and will not operate in other applications. Trouble may also occur.
- ⊘ **Immediately after flight, do not touch the S9251 case.**  
The heat sink section of the case is extremely hot, and may cause burns.
- ❗ **When mounting in the fuselage, install the S9251 so that it does not touch the servo case and metal parts of the helicopter frame.**  
The middle case has an aluminum heat sink construction, and will generate a large amount of noise if touched. In this case, it will become impossible to receive and is extremely dangerous.

### Current Drain:


The S9251 is designed to be used with the GY601 gyro only, especially to operate at high speed. Therefore, the servo starts, a correspondingly large current flows and the current drain is, therefore, large. Constantly pay attention to the remaining capacity of the Nicd battery and decide the number of safe flights. Always pay attention to the following points:

- Always use an Nicd battery. A dry cell battery will not display the spspecified performance.
- When using the S9251 in a system with a battery fail safe function, the cut-off voltage is set to a high value. Shortening of the flight time due to this must be included in calculation.
- Install the servo so that it does not get caught on the push rod or does not loosen even when operated over its full travel. If unreasonable force is applied, the current drain will increase tremendously and shorten the life of the servo and accelerate battery consumption.

# BEFORE USE

## Set Contents


After unpacking the GY601 set, first check if the following parts are provided:

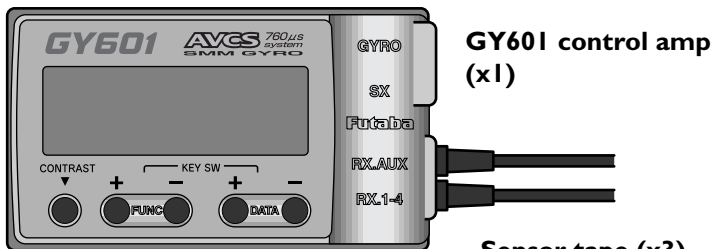


**GY601 sensor (x1)**




**Sensor tape (x3)**



**Mini screwdriver (x1)**



**S925I servo (x1)**  
(Only a set w/servo)

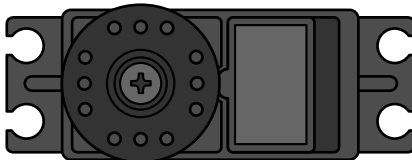



# AVCS Gyro

## Differences Between AVCS Gyro and Conventional Gyro


Compared to a conventional gyro, the AVCS gyro has a substantially improved tail control capacity. Gyro operation also differs from that of conventional systems in a number of ways.

The following sequentially describes the conventional gyro and the AVCS gyro.

### Conventional gyro

The conventional gyro detects movement of the helicopter's tail and controls the rudder servo so that movement of the tail stops.

Now, consider hovering when the helicopter is exposed to a side wind, the tail drifts. When the tail drifts, the gyro detects the tail rotation angular velocity and operates the servo in the direction that stops the tail from moving. Drifting of the tail is stopped by control from the gyro. When the tail stops drifting, the control amount from the gyro becomes zero. Since the helicopter is always exposed to side wind, even in this state, the tail starts to drift again. When the tail drifts, the gyro tries to stop it again. The "drifting stop" operation is repeated and the tail continues to drift in the wind direction in this manner. The higher the gyro sensitivity, the smaller the amount of this drift. However, if the sensitivity is high, hunting will occur and, therefore, the sensitivity amp has a limit.

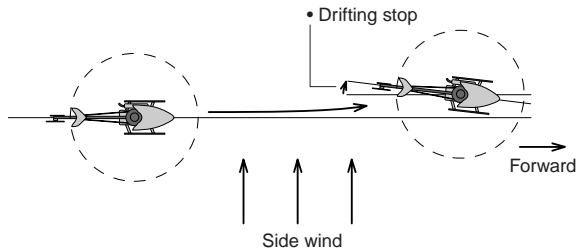


### AVCS gyro

This following describes how the AVCS system works when the helicopter is exposed to a side wind while hovering, the same as the preceding item.

When the helicopter is exposed to a side wind, the tail begins to drift. The

gyro controls the servo so that the movement of the tail stops, the same as a conventional gyro. At the same time, a sensor is controlled so that the tail is rotated in the opposite direction (returns to the original position). In short, the conventional gyro performs an operation known as "drifting stop", but the AVCS system performs an operation that "stops drifting and returns to original position". The "return to original position" operation added to the AVCS system improves rudder trim operation. In other words, the gyro can automatically trim the rudder against side winds. This also applies to reverse flight. When a helicopter is flying in the forward and reverse directions, the rudder trim is changed to advance, but with the AVCS system, this trim change is performed automatically and instantaneously so that the tail remains extremely stable even during high-speed reverse flight.

The AVCS system requires a high-precision angular velocity sensor. The GY601 realizes a high-precision angular velocity detection function and extremely small output drift by using a new type of gyro sensor. This minimizes rudder neutral position drift during flight and eliminates the need to trim the rudder during flight.

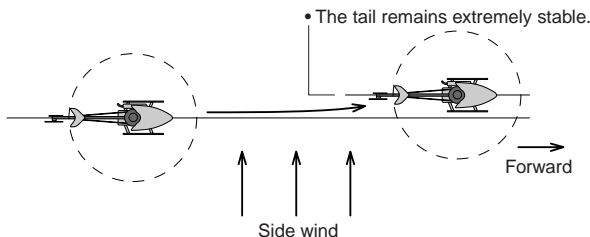

### Differences in rudder control method

The following describes the differences between conventional gyro and AVCS gyro rudder control.

The conventional gyro sends the rudder control signals from the transmitter to the rudder servo and starts to move the tail. When the tail moves, the gyro detects this movement and generates a signal to stop it. If the tail continues to move even in this state, a rudder control signal larger than the signal from the gyro must be applied from the transmitter. That is, the difference between the rudder control signal from the transmitter and the control signal that attempts to stop this from the gyro becomes the actual amount of movement of the tail. Ordinarily, the rudder control signal is amplified

several times over by the gyro amp and is balanced with the gyro control signal so that the transmitter can be used at the normal steering angle.

The AVCS system uses a different rudder control method. As described in the preceding section, it has additional functions that "attempt to return movement by external force to the original position" and that generate an angular velocity proportional to the rudder control signal. That is, it functionally controls the speed of rotation of the tail. The original AVCS (Angular Vector Control System) came from this.

- In the AVCS mode, when the transmitter rudder stick is moved when the helicopter was stopped, the rudder servo controls operation until the tail reaches the specified rotational speed.
- Trim deviation of the rudder control signal also becomes a signal that causes the tail to turn so that even a little trim deviation causes the tail to move. Therefore, the rudder trim is made the same in all flight states and must match the neutral reference signal at the gyro. The method of reading the rudder neutral signal at the gyro will be described separately.
- Since the rudder mixing signals from the transmitter also become a tail rotation signal, all the rudder mixing functions must be disabled.
- In the AVCS mode, the gyro automatically trims the rudder so that linkage changes cannot be verified. Initially, the GY601 trims the rudder by flying in the Normal mode to take the rudder linkage neutral position. This centers the linkage. At this time, this rudder neutral reference point is read to the GY601.

Giving the gyro the rudder neutral reference signal and performing tail operation by referring to this signal in the AVCS mode in this way is how the AVCS system differs from the conventional system.


# DATA SETTING

## Name and Function of Each Part

### GY601 control amp

LCD display

Displays the set data. (8 characters X 1 line) (Input/output terminals)

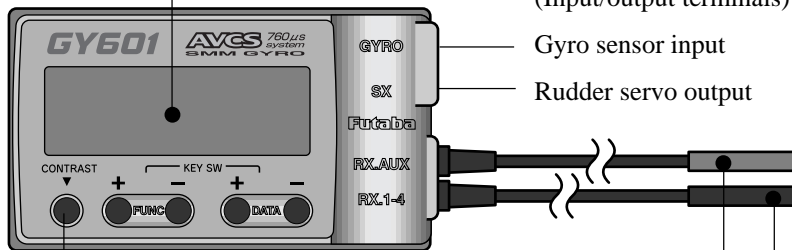

Edit keys

Used when setting data.

Operated by pushing with the accessory mini screwdriver.

(Receiver connectors)


Remote gain input

Rudder input

LCD contrast trimmer

Allows adjustment of the contrast so that the LCD display is easiest to see. It is adjusted with the accessory mini screwdriver.

### GY601 gyro sensor

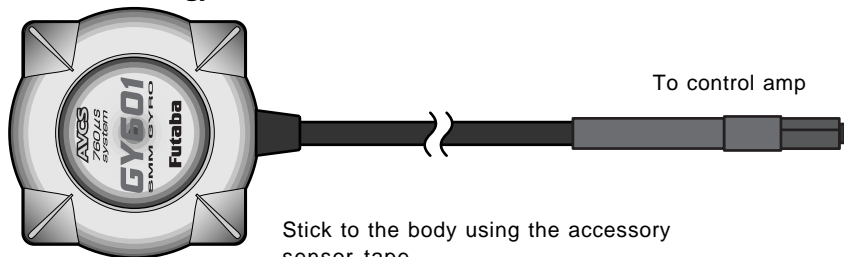


Stick to the body using the accessory sensor tape.

# LCD Display and Edit Keys

## LCD display

Set data display and operation status monitoring are possible.

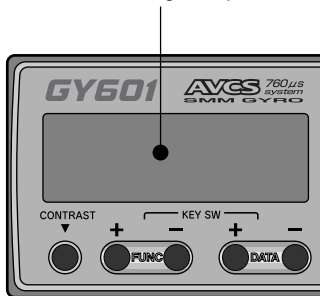

## Edit keys


### Setup screen call

The setup screens can be sequentially called with the FUNC+ or FUNC- key. For the order in which the setup screens are called, see the function map.

### Data setting

Perform data setting with the DATA+ or DATA- key. When setting a value, the data is increased when the DATA+ key is pressed and is decreased when the DATA- key is pressed. The mode can also be selected using either the DATA+ or the DATA- key.

# Function Map

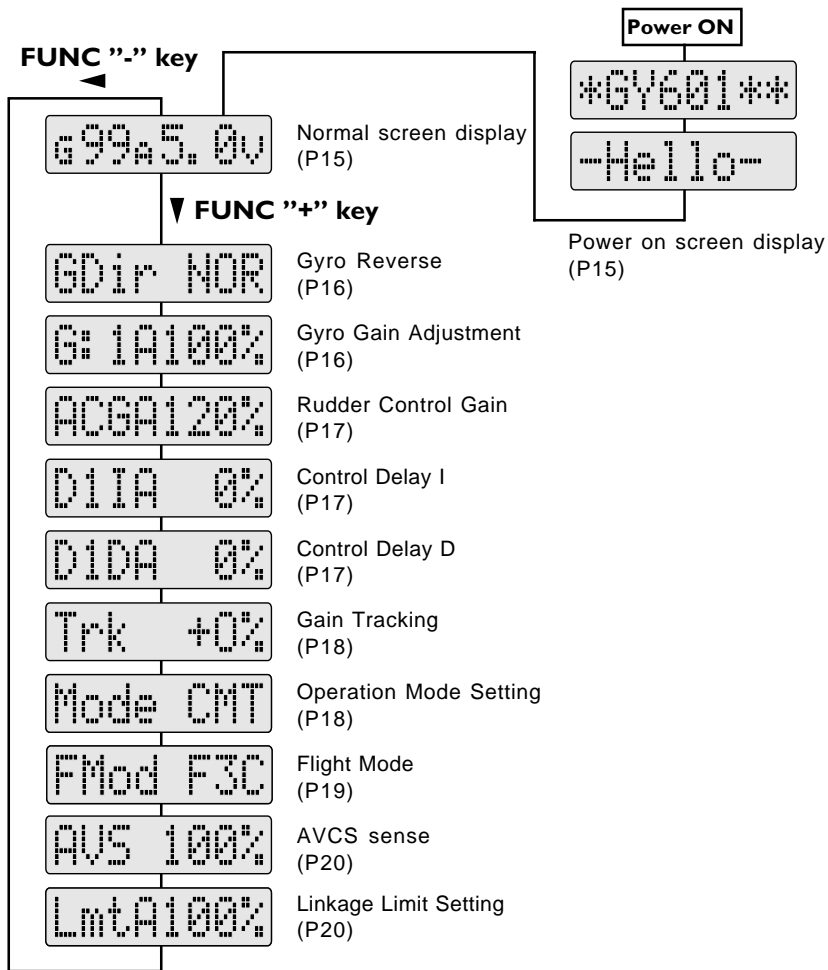

# GY60I Functions Setting

## Power on screen display

\*GY60I\*\*

-Hello-

When the gyro power is turned on after the transmitter power was turned on, -Hello- blinks for about three seconds to initialize the data inside the gyro. During this period, do not move the transmitter rudder stick or the helicopter. If the transmitter rudder stick or the helicopter is moved by mistake, the rudder neutral data will not be correctly read.

## Normal screen display

g99#5.0V

•Actual gain (sensitivity) display

•Operation mode display

N : NOR mode

A : AVCS mode

■ : Neutral offset

•Power supply voltage display

•During rudder neutral reset operation, \*\*\*\* is displayed.

•During rudder servo reset operation by rudder stick, ---- is displayed.

Low Batt

## Low battery alarm

When the power supply voltage drops to 3.8V or less, LOW Batt is displayed. When this message is displayed, immediately stop use and recharge the Nicd battery.

## Gyro Reverse

Initial value: NOR

A rectangular LCD display with a black border showing the text 'GDir NOR' in a pixelated font. The 'G' is larger than the other characters.

Sets the gyro operation direction. NOR or REV can be selected.

Set so that when the helicopter is banked right, left correction rudder is applied and when the helicopter is banked left, right correction rudder is applied.

## Gyro Gain Adjustment

Initial value: 100%

A rectangular LCD display with a black border showing the text 'G: 1A100%' in a pixelated font. The 'G' is larger than the other characters.

Adjusts the gyro gain. Setting range is 0 to 120%.

Two-point (G:1, G:2) gain adjustment is possible. When A is displayed, the gyro is in the AVC mode and when N is displayed, the gyro is in the NOR mode in accordance with the operation mode setting.



## Rudder Control Gain

Initial value : ACG: 120%, NCG: 130%

A digital display showing the text "ACGA 120%" in a monospaced font. The display is enclosed in a rectangular border.

Adjusts the rudder stick operation gain. Setting range is 10% to 250%.

AVCS and NOR mode gain can be set independently. In the AVCS mode, ACG is displayed and in the NOR mode, NCG is displayed. The display automatically changes to A or B according to the direction of the rudder stick and the gain of each direction can be set. This function is used when tracking rudder operation gain between the AVCS and NOR modes.

## Control Delay I

Initial value : 0%

A digital display showing the text "D1IA 0%" in a monospaced font. The display is enclosed in a rectangular border.

Sets the delay when the rudder stick was pushed operated. Setting range is 0 to 100%. Rudder stick left and right can be set separately.

## Control Delay D

Initial value : 0%

A digital display showing the text "D1DA 0%" in a monospaced font. The display is enclosed in a rectangular border.

Sets the delay when the rudder stick was returned. Setting range is 0 to 100%. Rudder stick left and right can be set separately.

## Gain Tracking

Initial value : +0%

A rectangular LCD display with a black border showing the text 'Trk +0%' in a pixelated font.

Adjusts left and right tail braking tracking. Setting range is -20% to +20%.

For example, when there is a sense of hunting when stopping left pirouette or the helicopter drifts when stopping right pirouette, shift Trk in the + direction. In the opposite case, shift Trk in the - direction.

## Operation Mode Setting

Initial : CMT

A rectangular LCD display with a black border showing the text 'Mode CMT' in a pixelated font.

Sets the gyro operation mode. Settings are NOR, AVC, and CMT. In the NOR mode, both G1 and G2 operate in the AVCS mode. In the CMT mode, G1 operates in the AVCS mode and G2 operates in the NOR mode. In the NOR mode, the GY601 operates the same as an ordinary gyro. In the AVC mode, the GY601 always operates in the AVCS mode. In the CM mode, the GY601 can be used in both the AVCS and NOR modes.

## Flight mode

Initial value : F3C



Switches the flight mode. Settings are F3C or 3D.

The F3C mode emphasizes tail suppression and stop. The 3D mode slightly sacrifices tail suppression and stop, but lets you control pirouette speed completely proportional with the rudder stick operation amount and is suitable for 3D flight.

### <3D mode steering angle setting>

During 3D mode setting, the transmitter rudder steering angle is set to 100% and approximately 500°/second high pirouette speed. Therefore, initially set the transmitter rudder steering angle to a low value so that the tail can be safely controlled. (About 70%)

The pirouette speed is proportional to the rudder steering amount without regard to the gyro sensitivity.

## AVCS Sense

Initial value : 100%

A rectangular LCD display showing the text "AVS 100%" in a pixelated font.

Adjusts the rudder control characteristic in the AVCS mode. Setting range is 50 to 150%.

Check the rudder operation feeling and stopping characteristic and adjust. When the flight mode (page 19) is the 3D mode, this value becomes the pirouette standard value.

## Linkage Limit Setting

Initial value : 100%

A rectangular LCD display showing the text "LmtA100%" in a pixelated font.


Sets the rudder servo travel limit.

Operate the rudder stick and adjust the rudder servo travel limit by pressing the +/- key so that the servo moves to the maximum linkage position. Use the same procedure to set both the left and right limits . When setting, move the servo substantially so that the rudder angle automatically becomes 200% and limit setting is easy. A or B is displayed for the right and left directions.

Note: When this screen is displayed, the GY601 does not operate as a gyro. To check operation, return to the initial screen, etc.

## Remote Gain Function

The remote gain function lets operator perform AVCS mode and Normal mode sensitivity adjustment and operation mode switching from the transmitter. The channel used here is called the "remote gain channel". (Channel 5 is used.)

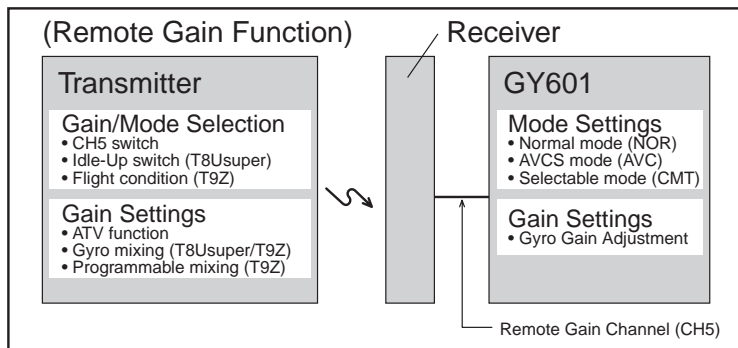

### When Using a T9Z World Champion Model Transmitter Gyro Sense Mixing

The Gyro Sense Mixing (GYR) function lets operator perform two-point gain adjustment at each condition. Set the sensitivity at all conditions.

#### [GY601 Settings]

Select the gyro operation mode at the GY601 Mode screen. (AVC, NOR, or CMT)

#### [Transmitter Settings]

ATV function:

Adjust both the RATE A and RATE B rates to 100% at the transmitter 5ch(GYR) ATV function setup screen.

Gyro Sense Mixing function:


1. Select the Dual Mode (DUO) at the transmitter Gyro Sense Mixing setup screen.
2. Set the GAIN1 and GAIN2 gains.

(The following page shows a setting example in the CMT mode.)

#### [Sensitivity Display]

The gain display indicates the actual gain at the GY601 normal screen display. The following shows the relationship between transmitter and gyro setting .

#### - Relationship between transmitter and gyro setting

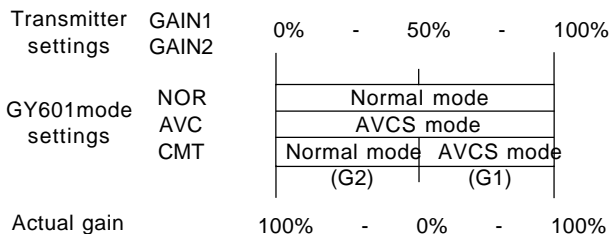


**(Setting Example)**

Adjust the gyro gain at the Gyro Sense Mixing setup screen at each condition.

The following shows a setting example in the CMT mode.

Select the Dual Mode (DUO).

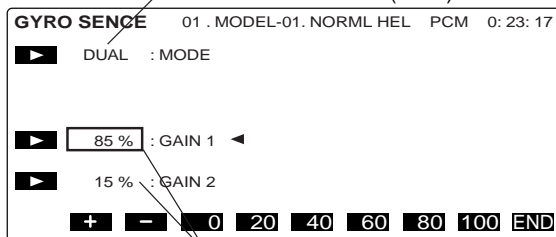

Sensitivity rate

Choose the GAIN1 or GAIN2 by the CH5 switch.

Use the following values as the sensitivity setting standard:

CH5 switch



GAIN1  
setting

Hovering

85%

Flight

70%

AVCS side



GAIN2  
setting

15%

30%

Normal side

Actual gain

70%

40%

The GY601 sensitivity is 0% at 50%. When set over 50%, the GY601 operates in the AVCS mode and when set under 50%, the GY601 operates in the Normal mode. When setting is changed 1%, the gyro sensitivity is changed 2%.

**When Using a T9Z Transmitter Programmable Mixing**

The Programmable Mixing (PMIX) function lets operator perform a gain adjustment at each condition. Set the sensitivity at all conditions.

**[GY601 Settings]**

Select the gyro operation mode at the GY601 Mode screen. (AVC, NOR, or CMT)

**[Transmitter Settings]**

Function Control:

Set the CH5 (GYR) switch to “NUL” at the transmitter Function Control (FNC) setup screen.

ATV function:

Adjust both the RATE A and RATE B rates to 120% at the transmitter ATV function setup screen.

Programmable Mixing function:


1. Select the “ACTIVE” mode (ACT) at the transmitter Programmable Mixing setup screen.
2. Set the mixing type to “OFS”.
3. Set the slave channel to “GYR”.
4. Set the sensitivity rate (RATE).

(The following page shows a setting example in the CMT mode.)

**[Sensitivity Display]**

The gain display indicates the actual gain at the GY601 normal screen display. The following shows the relationship between transmitter and gyro setting.

**- Relationship between transmitter and gyro setting**

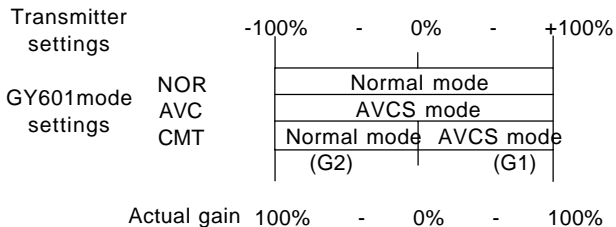



**(Setting Example)**

Adjust the gyro gain at the Programmable Mixing setup screen at each condition. The following shows a setting example in the CMT mode.

Select the "ACTIVE".

```

PROG MIX 1      01 . MODEL-01. NORML HEL  PCM  0: 23: 17
▶ ACTIVE : MODE ( ON)          TRIM: ***** ◀
▶ *** : MASTER          MSTR MIX MODE: ***** ◀
▶ GYR : SLAVE          [SWT]
▶ [OFS] : MIX TYPE          [NXT]
[LIN] [OFS] [HOV] [CRV] [CTL]          [END]
  
```

Select the "GYR".

Select the "OFS".

```

PROG MIX 1      01 . MODEL-01. NORML HEL  PCM  0: 23: 17

▶ [ + 70 % ] : RATE
[+/-] [ + ] [ - ] [ 0 ] [ 20 ] [ 40 ] [ 60 ] [ 80 ] [ 100 ] [ END ]
  
```

Sensitivity rate

Use the following values as the sensitivity setting standard:

	Hovering		Flight	
AVCS mode	—	+70%	—	+40%
Normal mode	—	-70%	—	-40%
Actual gain		70%		40%

When set over 0%, the GY601 operates in the AVCS mode and when set under 0%, the GY601 operates in the Normal mode.

### When Using a T8Usuper Transmitter

The Gyro Mixing (GYRO) function lets operator perform a gain adjustment at each Idle-Up switch position.

#### [GY601 Settings]

Select the gyro operation mode at the GY601 Mode screen. (AVC, NOR, or CMT)

#### [Transmitter Settings]

Gyro Mixing function:


1. Select the "ON" mode at the transmitter Gyro Mixing (GYRO) setup screen.
2. Select the Idle-Up switch(SW-E) for the sensitivity selection.
3. Set the "NORM", "IDL1" and "IDL2" gains.

(The following page shows a setting example in the CMT mode.)

#### [Sensitivity Display]


The gain display indicates the actual gain at the GY601 normal screen display. The following shows the relationship between transmitter and gyro setting.

### - Relationship between transmitter and gyro setting

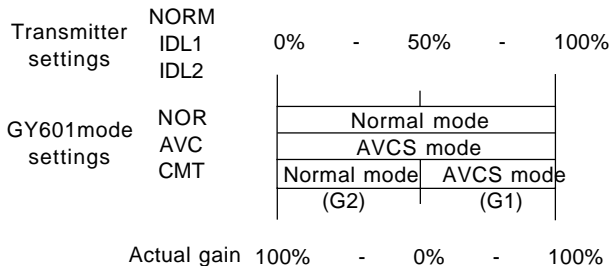




**(Setting Example)**

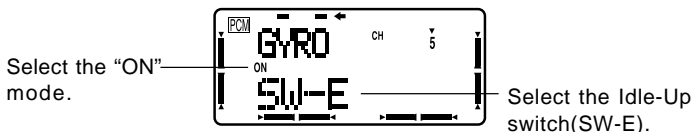Adjust the gyro gain at each the Idle-Up switch position at the Gyro Mixing setup screen. The following shows a setting example in the CMT mode.



Set the "NORM", "IDL1" and "IDL2" gains at each setup screen.

Use the following values as the sensitivity setting standard:

	( NORM )	( IDL1 )	( IDL2 )
SW-E			
	Hovering	Flight	
AVCS mode	85%	70%	
Normal mode	15%	30%	
Actual gain	70%	40%	

When set over 50%, the GY601 operates in the AVCS mode and when set under 50%, the GY601 operates in the Normal mode.

### When Using a Transmitter ATV Function

The ATV function lets operator perform a gain adjustment at each CH5 switch position.

#### [GY601 Settings]

Select the gyro operation mode at the GY601 Mode screen. (AVC, NOR, or CMT)

#### [Transmitter Settings]

ATV function:

Set the ATV rates at the transmitter CH5 ATV function.

#### [Sensitivity Display]

The gain display indicates the actual gain at the GY601 normal screen display. The following shows the relationship between transmitter and gyro setting.

#### - Relationship between transmitter and gyro setting

		CH5 Switch Forward side		CH5 Switch Front side	
Transmitter settings	ATV rates	90%	-	0%	90%
GY601mode settings	NOR	Normal mode		Normal mode	
	AVC	AVCS mode		AVCS mode	
	CMT	Normal mode (G2)		AVCS mode (G1)	
	Actual gain	100%	-	0%	100%

## When Using a GY601 Gyro Gain Adjustment Function

### [Transmitter Settings]

Adjust both the ATV rates to 90% at the transmitter Ch5 ATV function.

### [GY601 Settings]

Operation Mode Setting function:

Select the gyro operation mode at the GY601 Mode screen. (AVC, NOR, or CMT)

Gyro Gain Adjustment function:

Set the G:1 and G:2 gains at the GY601 G:x screen.

### - Relationship between transmitter and gyro setting

Transmitter settings	ATV rates	CH5 Switch	CH5 Switch			
		Forward side	Front side			
		90% (Fixed)	90% (Fixed)			
GY601mode settings	NOR	Normal mode	Normal mode			
	AVC	AVCS mode	AVCS mode			
	CMT	Normal mode	AVCS mode			
		(G2)	(G1)			
Actual gain		100%	-	0%	-	100%

## Initialization

---

AVCS mode operation is based on the rudder neutral data stored in the GY601. When using the GY601 for the first time, or when the internal reference data and the transmitter neutral position differed when the transmitter neutral trim was adjusted, etc., the rudder neutral data must be read again.

### [At power ON]



When the power switch is turned on, the GY601 automatically obtains the reference signal for AVCS function correction and initializes itself.

- When the power was turned on in the Normal mode, the rudder neutral position already memorized in the GY601 is not updated.
- When the power was turned on in the AVCS mode, the rudder signal at that point is memorized and updated.

## Caution

### Precautions When Turning on the Power Switch

During initialization, the message “-Hello-” appears on the GY601 LCD screen.

-  **Do not move the helicopter until this message disappears (in about 3 seconds).**
-  **Also, do not move the transmitter rudder stick from the neutral position during this period.**

**[During use]**

When the rudder was re-trimmed in the Normal mode and the new trim position also affects the AVCS mode, the rudder trim neutral position must be memorized in the GY601.

**Re-reading method**

In this case, quickly switch (interval of within 1 second) the transmitter remote gain switch between the Normal and AVCS sides at least three times and switch the AVCS side at the neutral trim position set in the Normal mode. This memorizes the new rudder neutral position in the GY601.

When the transmitter has a function that allows trim setting for each flight condition, such as the T9Z, the AVCS mode trim position is fixed and this operation is unnecessary.

**⚠ Caution**

- ⊘ **Never use the transmitter rudder trim in the AVCS mode.**  
When the rudder is trimmed during flight, the neutral position will change.
- ❗ **When using the GY601 in the AVCS mode, set revolution mixing to OFF.**
- ❗ **When the rudder neutral position was changed by the linkage, the rudder neutral position in the AVCS mode must always be re-read before use.**

# INSTALLATION AND ADJUSTMENT

Install and adjust the GY601 as described below.




- When making GY601 adjustments, always use the accessory miniature screwdriver and do not apply excessive force.

## Installing to Fuselage

### I Installing sensor and amp

GY601 sensor



Frame gyro bed

- Install the sensor so that the bottom of the gyro is perpendicular to the main rotor shaft axial direction. Offset of this axis will also react in the roll and pitch directions.

Install the GY601 sensor to the fuselage using the accessory sensor tape. Also routinely check the sensor tape and replace the tape if it is saturated with oil or partially peeled.

\*Oil on the sensor bottom and the part installed to the frame can be wiped off with cleaner, etc.

### Sensor installation precautions

- Always use the accessory sensor tape to install the sensor. Install the sensor to the center of the sensor tape.
- Depending on the vibration from the helicopter, the sponge may tear near the corners of the sensor tape. If the helicopter is flown in this state, vibrations will not be sufficiently absorbed and the sensor may fall off. Before flight, always check the sensor installation state. If the sponge is torn, replace it.

### Installing control amp

- When installing the control amp, after the end of sensitivity adjustment, vibration-proof the amp by wrapping it in sponge, the same as the receiver.




## 2 Connections

Connect the GY601, receiver and servo as shown below.

## ⚠ Warning

❗ **Insert the connectors fully and firmly.**

If a connector works loose due to vibration during flight, control may be lost and result in a dangerous situation.

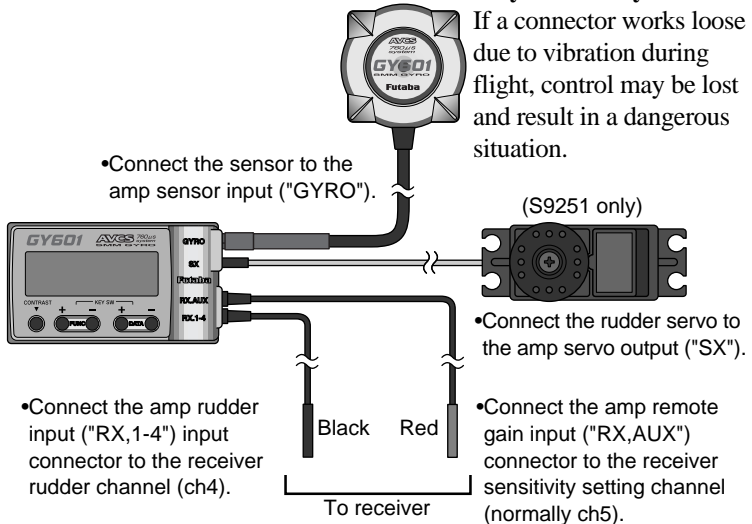

## ⚠ Caution

❗ **Always use the special S9251 servo with the GY601.**

The GY601 cannot operate with servos other than the S9251. The servo may be destroyed.

## 3 Gyro operation mode selection

When using the gyro only in the NOR mode, select NOR. When using the gyro only in the AVCS mode, select AVCS. When using the gyro in both the AVCS and NOR modes, select CMT.

Mode NOR

Mode AVCS

Mode CMT

\*However, when using the gyro in the CMT mode, since the AVCS and NOR mode gain must be set during hovering and in flight, a transmitter with a gyro mixing function (T9Zwc series, T8U super series) is necessary.


•For a description of transmitter setting, see the remote gain function (p21).

## 4 Rudder servo linkage check

Make the initial linkage connections in the NOR mode. In this case, make adjustments mechanically and make minimum trimmer adjustments at the transmitter.

In the NOR mode, make the following linkage checks:

•In the rudder neutral position, connect the linkage at the position at which the servo horn and control wire are perpendicular.

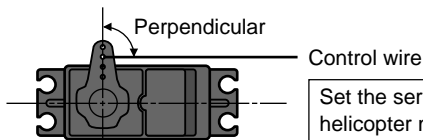

Set the servo horn length based on the helicopter manufacturer's instructions.

Move the rudder stick to the right and left and check the direction of operation of the tail rotor. If the tail rotor turns in the wrong direction, reverse the direction with the transmitter reverse function.

## 5 Gyro operation direction check

If the rudder servo moves to the left when the nose of the helicopter moves to the right, the gyro direction is correct.

If the rudder servo moves to the right, switch the direction using the GDir screen.

GDir NOR

\*If you try to fly the helicopter while the gyro direction is incorrect, when the rotor rotates clockwise, the helicopter nose will yaw to the left and cause an extremely dangerous situation.

## 6 Limit setting

Move the rudder stick to the left and right and perform adjustment at the Lmt screen so that the servo operation angle becomes the maximum value at which the servo horn does not strike the linkage.

\*When flying, the servo horn does not move beyond this set angle, thus protecting the linkage. However, if the limit setting is too low, gyro performance will be effected.

\*In this mode, only the stick operates; the gyro does not operate.

## 7 Gyro gain setting (tentative setting)

The initial gain of the GY601 is 100% for both G1 and G2. When setting the gain from the transmitter, leave it at the 100% reference gain.

Make the following value the gain setting criteria.

A setting example when a T9Zwc series transmitter was used is described below. When using another transmitter, see "Remote gain function" on page 21.

(T9Zwc transmitter setting)

- Call the transmitter GYR setting screen.
- Adjust the gain when hovering to 90% at the AVCS side and 10% at the normal side on the transmitter screen.
- Set the gain in flight to 80% and 20% for the AVCS and NOR mode, respectively, on the transmitter screen.
- At this time, the GY601 gain display becomes 80% for hovering and 60% for flight.(\*1)

(\*1) In the case of the T9Zwc GYR function, GY601 gain is 0% for a transmitter setting of 50%. When the gain is set above 50%, the GY601 operates in the AVCS mode and when the gain is set below 50%, the GY601 operates in the normal mode. The gyro gain changes 2% for every 1% gain change.

When using a transmitter without a gyro gain switching function, connect the gain setting connector to an idle channel and set the GY601 G1 and G2 gains using this gain setting screen. Gain can be trimmed by means of the transmitter ATV function.

## 8 Transmitter setting check

Checks the transmitter setting in the ACVS mode. Check that the transmitter is not set so that the neutral position has shifted.

(Transmitter setting)

- Set all rudder mixings to INH.
- Set all hovering and flight rudder trims to the same position.
- Set rudder ATV to 100% under all conditions.
- Also set the T9Z condition delay function to INH.

If the normal screen operation mode display is “A” under all usage conditions, neutral offset is OK. If “■” is displayed, display “A” by operating the rudder trimmer for that flight condition.

## 9 Rudder neutral position check

In the AVCS mode, the rudder servo neutral position is unknown. Check the neutral position by switching the GY601 to the NOR mode, or by moving the rudder stick to the left and right at least three times at high speed and immediately returning the stick to the neutral position. This temporarily resets the rudder servo.

## Flight Adjustments

**1** In the AVCS mode, turn on the transmitter power, then turn on the gyro and receiver power. This reads the rudder neutral signal at the GY601.

- Never move the helicopter or rudder stick during the approximately three seconds that the -Hello- display blinks.

**2** Hover in the Normal mode and adjust the rudder neutral position.

- In the AVCS mode, the rudder neutral position is automatically set, and linkage changes cannot be verified. First, perform rudder neutral adjustment in the Normal mode.
- Move the transmitter trim lever and reset the neutral position. When the rudder servo neutral position has changed considerably, readjust the linkage.

**3** When the transmitter rudder trim was adjusted, the rudder neutral data must be read to the GY601. Therefore, always perform the following operations:

- Switch the transmitter sensitivity switch quickly (internal of within 1 second) between AVCS and Normal at least three times. "\*\*\*\*\*" is displayed on the LCD screen to show that data is being memorized. During this operation, never move the transmitter rudder stick from the neutral position for at least 1 second immediately after switching the switch in the state in which the model is on the ground. Memorization and updating is executed only when the sensitivity switch is in the AVCS mode position.

**4** Set the sensitivity to the position at which hunting does not occur during hovering and flight.

- When the helicopter tail hunts, set the gyro sensitivity to a lower value. When adjusting the gyro sensitivity, increase and decrease the sensitivity gradually while checking.
- When the sensitivity is low even when the gyro sensitivity is 100%, make the rudder servo horn position longer. The sensitivity can be increased (up to 120%) at the GY601 gyro gain adjustment screen, or by increasing the ATV amount of the transmitter sensitivity setting channel. The actual sensitivity can be checked on the GY601 normal screen display.

**5** Adjust the hovering and flight rudder effect using the transmitter's D/R or AFR function.

- Do not adjust with the ATV function. If the ATV function is used, trimming may change.

**(If necessary)**

**6** When you sense a difference in the rudder effect between the AVCS and Normal modes, adjust using the GY601 rudder control gain.

NOGA130%

- Adjustment method

When the rudder effect in the AVCS is different from the rudder effect in the Normal mode after adjustment was performed using the transmitter's D/R or AFR function, adjust the difference using the NCGx parameter.

**7** Adjust the left and right pirouette stopping state by control delay and tracking.

D11A 0%

D1DA 0%

Trk +0%

- Adjustment using the delay function of the T9Z transmitter is also possible. Since the gyro gain also has a large effect on the stopping state, make this adjustment after adjusting the sensitivity.

**8** Adjust the rudder operation feel using the GY601 AVCS sense in the AVCS mode.

(Steering angle, neutral suppression, and pirouette stopping)

AVS 100%

**9** When you want to use rudder mixing in the Normal mode, set the transmitter so that rudder mixing is applied only during Normal mode operation. Never use rudder mixing in the AVCS mode.

# REFERENCE

## Specifications

---

\* Specifications are subject to change without prior notice.

### **GY601 Ratings**

Yaw-axis stabilizer for helicopter (rate gyro)

Display device: 8-character dot matrix liquid crystal display

Operating voltage range: DC 3.8V to 6.0V

Current drain: 70mA (@5.0V, including sensor)

Dimensions: 57 x 32 x 15mm (amp), 34 x 34 x 18mm (sensor)

Weight: 34g (amp) + 24.5g (sensor)

### **S9251 Ratings**

Dimensions: 40 x 20 x 36.6mm

Weight: 57g

Speed: 0.07sec/60° (at 4.8V)

Torque: 3.7kg-cm (at 4.8V)



## Definition of Abbreviations

The following defines the abbreviations and symbols used in this manual in alphabetical order. The function names are given on the description pages.

3D	3D mode. p19	H	
A		Hello	Power on screen display.
ACGA/B	Rudder control gain	High	High side.
	(AVCS) p17	I	
AFR	AFR function.	IDLE	Transmitter power OFF state.
ATV	ATV function. Steering angle adjustment function.	INH	Use inhibited state.
AVC	AVCS mode.	L	
AVCS	AVCS system. AVCS mode.	LCD	Liquid crystal display screen.
AVS	AVCS sense. p20	LmtA/B	Linkage limit setting. p20
C		Low	Low side.
CMT	Normal/AVC switching mode.	LOW BAT	Low battery error display.
D		M	
D1DA	Control delay. p17	Mode	Operation mode setting. p18
D1IA	Control delay. p17	N	
D/R	Dual rate function.	NCGA/B	Rudder control gain (Normal) p17
DUO	T9Z dual gain control mode.	NOR	Normal mode. Normal side.
F		P	
F3C	F3C mode. p19	PMIX	Programmable mixing.
Fmod	Flight mode. p19	R	
G		REV	Reverse side.
G:1A/N	Gyro gain 1 side. p16	T	
G:2A/N	Gyro gain 2 side. p16	Trk	Gain tracking. p18
GDir	Gyro reverse. p16		
GYRO	T9Z gyro sense mixing.		

# GY60I Parameters Sheet

\* Copy and use.

Helicopter: \_\_\_\_\_

Date: \_\_\_\_\_

Parameter		Initial value	Set value	Remarks
<b>GDir</b> Gyro Reverse		NOR		NOR/REV
<b>G:xx</b> Gyro Gain Adjustment	G:1 G:2	100% 100%		0-120% 0-120%
<b>ACGx, NCGx</b> Rudder Control Gain	ACGA ACGB NCGA NCOB	120% 120% 130% 130%		10-250% 10-250% 10-250% 10-250%
<b>D1Ix</b> Control Delay I	D1IA D1IB	0% 0%		0-100% 0-100%
<b>D1Dx</b> Control Delay D	D1DA D1DB	0% 0%		0-100% 0-100%
<b>Trk</b> Gain Tracking		+0%		-20-+20%
<b>Mode</b> Operation Mode Setting		CMT		CMT/NOR/AVC
<b>Fmod</b> Flight Mode		F3C		F3C/3D
<b>AVS</b> AVCS Sense		100%		50-150%
<b>Lmtx</b> Linkage Limit Setting	LmtA LmtB	100% 100%		

---

**FUTABA CORPORATION**

Makuhari Techno Garden Bldg., B6F 1-3 Nakase, Mihama-ku, Chiba 261-8555, Japan  
Phone: (043) 296-5118 Facsimile: (043) 296-5124